



B72
BLUELIFT






The BLUELIFT Series (work height 39'- 85')

ReachMaster offers the most progressive line of track based aerial lifts from the well-renowned Italian manufacturer Bluelift. The Bluelift features the FIRST-EVER compact lift with lithium battery/combustion engine hybrid in the USA. With working heights from 39' to 85', indoor/outdoor use and access through a single or double door, the BLUELIFT series appeals to a broad range of applications: Rental (residential and commercial), window cleaning, building maintenance, tree care and HVAC operations to name a few. The B72 features an innovative electro-hydraulic system which gives the user ability to operate two independent functions at the same time, improved efficiency, the convenience of one controller fits all and many many more.

The new system, coupled with BlueLift's class-leading Lithium Hybrid technology threatens to revolutionize the world of compact lifts, moving the world of tracked machines closer to the operator and making these hugely versatile stalwarts of the powered access world more accessible, simpler to use and most important, safer.

Model	B72
Working height	72ft
Basket height	66ft
Max outreach	36ft (max outrigger)
Basket capacity	550 lbs
Basket dims	4ft3 ³ / ₄ in x 2ft3 ¹ / ₂ in
Basket rotation	+/-80°
Turret rotation	360°
Height	6ft6in
Length (w/o basket)	14ft8 ¹ / ₂ in
Length (w/ basket)	17ft3in
Width (w/o basket)	3ft1in
Footprint	Variable
Weight (approx)	6,600lbs
Max pressure, tracks	6.8 psi
Max pressure, footplate	90.4 psi
Track size (per track)	58-3/4in x 9 ¹ / ₂ in
Foot pad size (per pad)	48 ¹ / ₂ sq in
110V drive motor	Standard
Honda gasoline engine	Standard
Hatz diesel engine	Option
Lithium battery	Option

We reserve the right to alterations

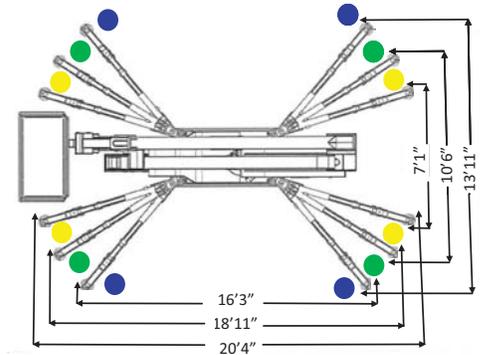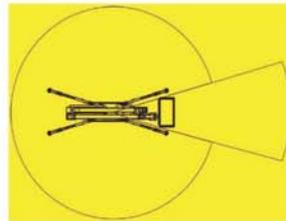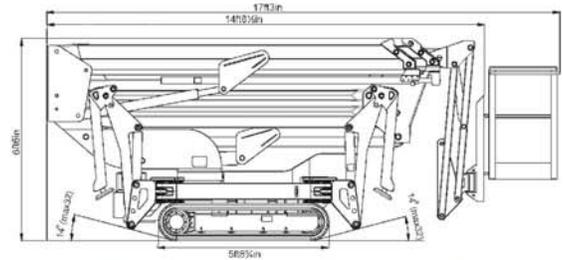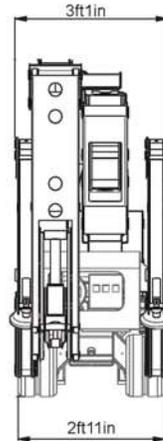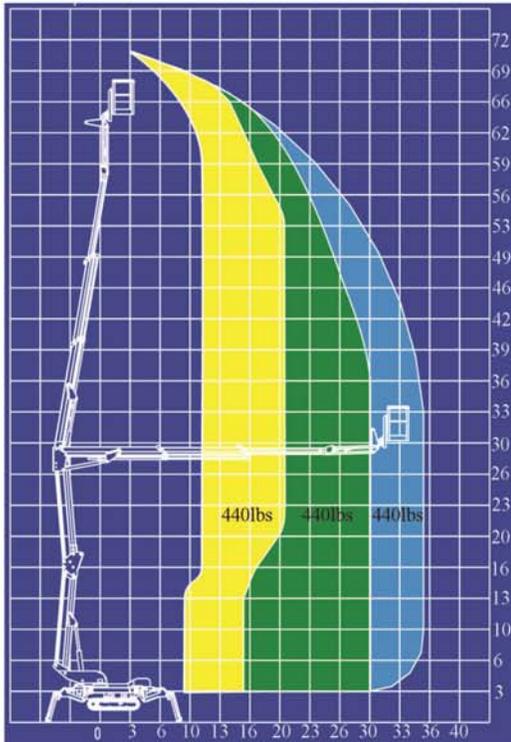

B72
BLUELIFT

Standard Equipment

- Automatic stability & outreach control
- Computer controlled (can-bus)
- Non marking tracks
- Self propelled
- 110V drive motor
- Honda iGX440 15HP engine
- 360° non cont. turret rotation
- Manual pump for emergency lowering
- Width of only 3ft1in
- 2 person basket
- Full work height with 440lbs in basket
- Full outreach with 440lbs in basket
- Air/water to the basket
- 110V to the basket
- Adjustable tracks
- 160° (+/-80°) basket rotation
- Wireless control
- FMS (Function Memory System)
- Automatic turret center stop

We reserve the right to alterations

Optional Equipment

- Hatz diesel engine
- Lombardi diesel engine
- Lithium battery

Additional Specifications

- Boom angle 0°/+75°
- Oil tank capacity 8gal
- Max windspeed 28mph
- Operating speed 0.9mph
- Travel speed 0.9mph
- Drive gradability 15°/28%
- Set-up gradability 10°/18%
- Outrigger set up (outside measurement)

- 16'3" X 13'11"
- 18'11" X 10'6"
- 20'4" X 7'1"



ReachMaster, Inc.
1416 D Stonehollow Dr.
Kingwood, TX 77339
TF: 866-358-7088
Tel: 281-358-7088
Fax: 281-359-3500
www.reachmaster.com