



# ARCTIC DURASHIELD


**PERFORMANCE YOU NEED,  
WHEN YOU NEED IT,  
WHERE YOU NEED IT.**

**Norseman's Arctic Durashield** ducting is dependable, high-performance heat gear with heavy-weight urethane-coated Polyester fabric, optimizing comfort and efficiency.



## **SPECIFICATIONS:**



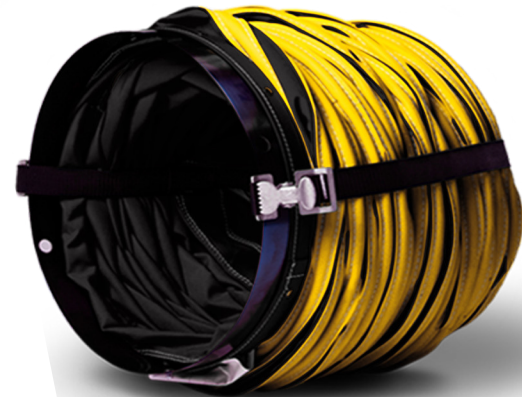

- Manufactured with durable urethane-coated Polyester; water, mold/mildew and fire resistant (FR), and odor-free.
- Durable FR Santoprene™ wear strip provides an additional layer of protection.
- Standard colors: Black with yellow wear strip.
- Wire helix provides a strong structure, ensuring consistent airflow.
- Integrated compression straps assist with carrying and ensure compact storage.
- Passes FR testing to NFPA 701 standards.



**In stock, ready to ship from one of our distribution locations.**

**Norseman's Arctic Durashield heat duct is *GEAR2PERFORM*.**

## **NORSEMAN, YOUR ONE-STOP SUPPLIER OF *GEAR2PERFORM*.**

-  **On-Demand Supply:** Warehousing space and distribution locations across North America.
-  **Exceptional Service:** One-stop supplier of Fabric, Foam and Film Protective solutions.
-  **Superior Quality:** Manufacturing in North America since 1921.
-  **Extensive Experience:** Our Fiercely Reliable™ team will find a solution to fit your business.

*Contact Norseman or your local Sales Representative to order today.*

**GEAR2  
PERFORM**

**CANADA 1.800.268.1918 NORSEMAN.CA**

**USA 1.844.667.7362 NORSEMANUSA.COM**



# ARCTIC DURASHIELD

**GEAR POINTS:** Features specifically designed to ensure Norseman Gear outperforms on your next jobsite.

Deliver warm air where you need it most.



**PROTECT**

Urethane-coated Polyester with FR Santoprene wear strip.



**WITHSTAND**

Horizontal or vertical airflow.




**FIT**

Multiple collar attachments allow for a quick and secure connection.



**PERFORM**

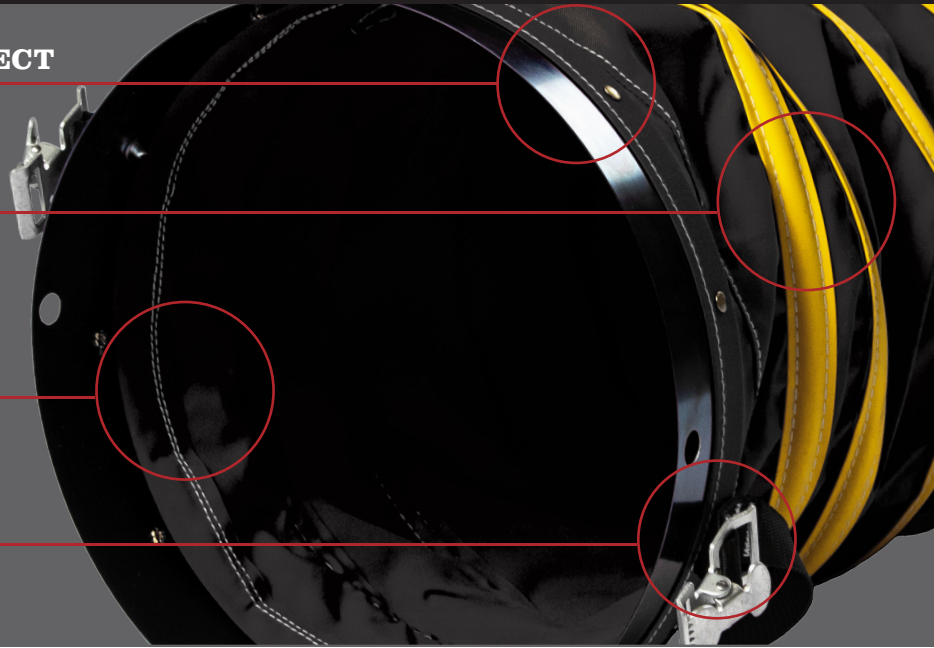

## **CONNECTION:**

- Available with pin-lock, wire-ring and belted-cuff collars.
- Used in both horizontal and vertical applications.

## **STANDARD SIZING:**

- 12" x 12'
- 12" x 25'
- 16" x 25'
- 20" x 25'
- 24" x 25'

## **TEMPERATURE RATING:**

-60°F to 325°F (-51°C to 162°C)

## **CUSTOMIZATION:**

*Custom Options Available*

ITEM NUMBER	COLLAR CONFIGURATION	DIAMETER	LENGTH
450947	Pin-Lock / Belted-Cuff Collars	12"	12'
450948	Pin-Lock / Belted-Cuff Collars	12"	25'
413335	Wire-Ring Collars (Both Ends)	12"	25'
413336	Wire-Ring Collars (Both Ends)	16"	25'
413334	Wire-Ring Collars (Both Ends)	20"	25'
450950	Belted-Cuff / Wire-Ring Collars	12"	12'
450951	Belted-Cuff / Wire-Ring Collars	12"	25'
450952	Belted-Cuff / Wire-Ring Collars	16"	25'
450953	Belted-Cuff / Wire-Ring Collars	20"	25'
450954	Belted-Cuff / Wire-Ring Collars	24"	25'

To learn more about Norseman and our gear, contact one of your local Norseman Sales Representatives or visit our website.

**CANADA 1.800.268.1918 NORSEMAN.CA**  
**USA 1.844.667.7362 NORSEMANUSA.COM**